

Haz

HazGuard 707/717/727/br



FEATURES

- Up to 150w incandescent.
- High temperature silicone gaskets provide a watertight seal.
- Four pole terminal block.
- Protective guard provided.

APPLICATIONS

- Ceiling, pendant and wall mount types
- Hazardous locations
- Marine and watertight requirements
- Oil and gas exploration and production

APPROVALS

- Class I Division 2 Groups A, B, C & D
- Class I Zone 2 Groups IIA, IIB, IIB + H2 and IIC
- Type 4X
- Conforms to IP66
- Marine Outside Type Saltwater
- ABS

STANDARDS

- UL 844 - Hazardous Locations
- UL 1598A - Luminaires for Marine Vessels

TECHNICAL SPECIFICATIONS

HOUSING

Cast marine brass.

GUARD

Cast marine brass.

HARDWARE

Stainless steel.

ENTRIES

Ceiling wall types supplied drilled and tapped with four 3/4" NPT outlets and three plugs. Pendant types supplied with one 3/4" NPT.

GASKET

One piece silicone.

MOUNTING

Ceiling, pendant or wall. Intended for lamp base-up mounting.

LAMP HOLDER

Medium base, high temperature PBT. Nickel plated copper screw shell. Shockproof optional.

GLOBE

Clear glass. Optional tempered.

LAMP TYPE

A-21 150w incandescent. Lamp not provided.

VOLTAGE

Rated to 250v.

TERMINAL BLOCK

Four pole 20 Amp terminal block housed in junction box.

TEMPERATURE CODES

Rating T2D at 40° C ambient. Supply wire 90° C.

ORDERING REFERENCES

PART NUMBER	DESCRIPTION	WEIGHT LBS
707BM7D2	Wall Mount	7.8
717BM7D2	Ceiling Mount	6.3
727BM7D2	Pendant Mount	6.5


SPECIAL OPTIONS

- SP
- Shockproof Lamp Holder
- HR
- Heat Resistant Clear Glass Globe

SPARE PARTS

Part No.	Description		
INX4000	LAMP HOLDER, Standard PBT	INX2007CLR	GLASS GLOBE, Clear
INX4000SP	LAMP HOLDER, Shockproof	INX2007HR	GLASS GLOBE, Clear Heat Resistant
INX1037B/SCR	GUARD	INX3558	LAMP, 150w A-21
GKT2002SIL	GASKET, Globe	CX3070	TERMINAL BLOCK, 4 pole
GKT3000SIL	GASKET, Junction Box		

DIMENSIONS

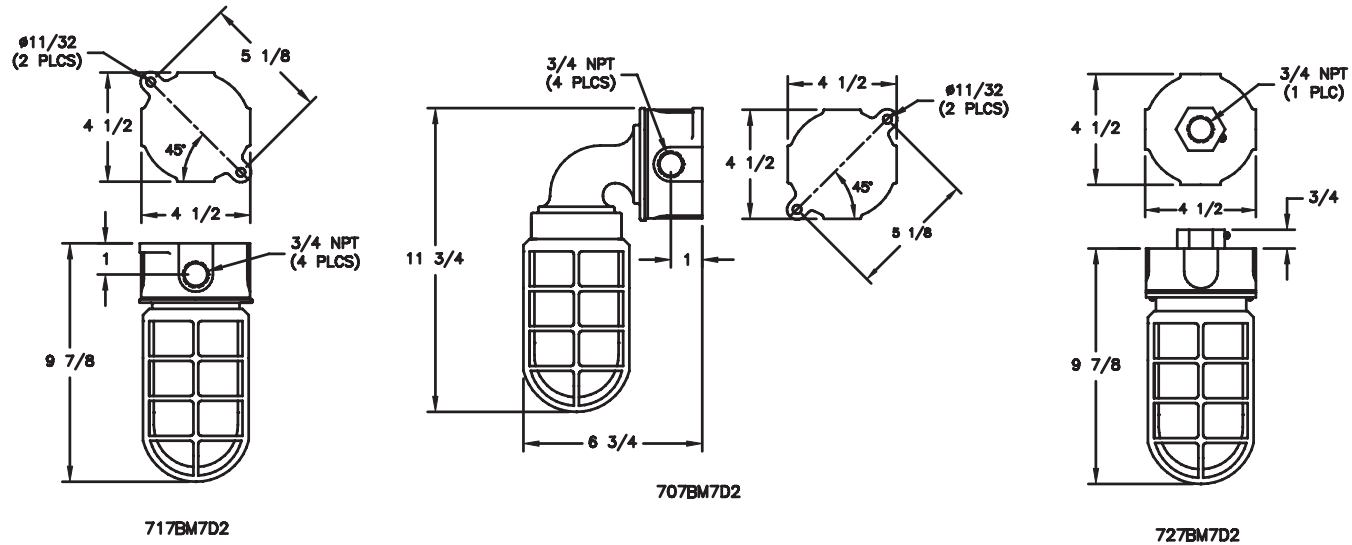

Dimensions in inches