

Pro

ProLamp

FE215/FE28/ml



FEATURES

- Adjustable arm extensions available.
- Impact resistant clear lens.
- Optional colored lenses available.
- Hinged lens frame allows transition between colored and white light.
- Double pole switch provided.
- Convenience outlet available.

APPLICATIONS

- Bulkhead mount desk and chart
- Marine interior
- Pilot house
- Office

APPROVALS

- Conforms to IP40
- Marine Inside Type
- ABS

STANDARDS

- UL 1598A - Luminaires for Marine Vessels

TECHNICAL SPECIFICATIONS

HOUSING/SHADE

Type 5052H32 aluminum with an electrostatically applied light gray polyester powder coat finish.

REFLECTOR

Type 5052H32 aluminum with an electrostatically applied polyester powder coat finish. Minimum 90% reflectance.

END CAPS

Acrylonitrile butadiene styrene (ABS).

LENS

8w - No lens, optional acrylic, choice of clear, red or yellow. 15w - acrylic lens, choice of clear, red or yellow.

ENTRIES

One 3/4" and one 1/2" NPT knockouts. See DIMENSIONS for details.

LAMP HOLDER

Polycarbonate, Bi-Pin.

LAMP TYPE

Two fluorescent 8w T5 Mini Bi-Pin G5 or 15w T8 Bi-Pin G13. Lamps not provided.

CONVENIENCE OUTLET

Optional 125v 3 wire 2 pole "U" ground. Not available on 220v models.

SWITCH


Double pole toggle.

BALLAST

120v 60 Hz. See SPECIAL OPTIONS for other options.

DIMENSIONS

FE28 Series

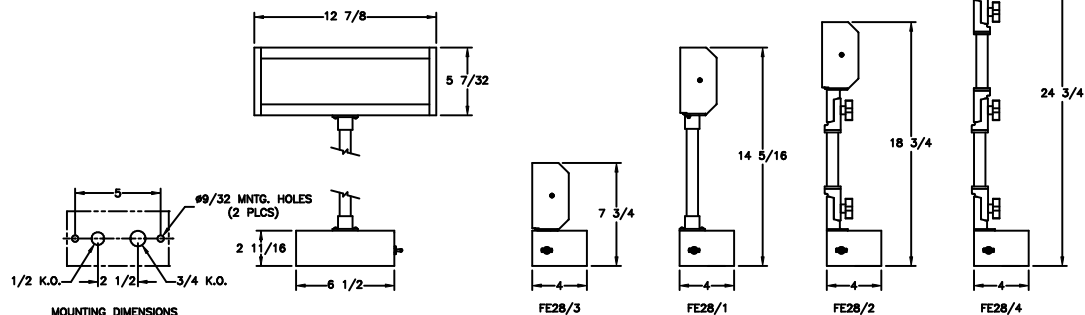

Dimensions in inches

