

# Pro

## ProStep 814/816/ml



### FEATURES

- Low profile flush mount step light.
- 814 models include louver to reduce glare and direct light.
- High temperature silicone gasket provides a watertight seal.

### APPLICATIONS

- Marine and watertight requirements
- Gangway/walkway steps

### APPROVALS

- Conforms to IP66
- Marine Outside Type Saltwater
- ABS

### STANDARDS

- UL 1598A - Luminaires for Marine Vessels

### TECHNICAL SPECIFICATIONS

#### HOUSING AND LENS FRAME

Cast copper free aluminum.

#### COVERS

Cast copper free aluminum with an electrostatically applied light gray polyester powder coat finish.

#### HARDWARE

Stainless steel.

#### ENTRIES

Standard units undrilled. Up to 1" NPT four way available. See ENTRY OPTIONS for selections.

#### GASKET

One piece silicone.

#### MOUNTING

Recessed wall type. See DIMENSIONS for details.

#### LAMP HOLDER

Medium base, porcelain.

#### LENS

Tempered glass.

#### LAMP TYPE

A-19 40w incandescent. Lamp not provided.

#### VOLTAGE

Rated to 250v.

## ORDERING REFERENCES

PART NUMBER	DESCRIPTION	NO. LAMPS	WEIGHT LBS
814AS	Clear Lens, Surface Louver	2	3.8
816AS	Frosted Lens, No Louver	2	3.6

## SPARE PARTS



Part No.	Description
INX4088	LAMP HOLDER
INX2114	LENS, 814, Clear
INX2002	LENS, 816, Frosted
INX3531	LAMP, 40w A-19
GKT5024	GASKET, Lens Frame
GKT5089	GASKET, Mounting

## ENTRY OPTIONS

NPT Trade Size	Dead End*	Thru Feed*	X-Positions
1/2"	E1	C1	X1
3/4"	E2	C2	X2
1"	E3	C3	X3

\*Entries on short side of casting.

## DIMENSIONS

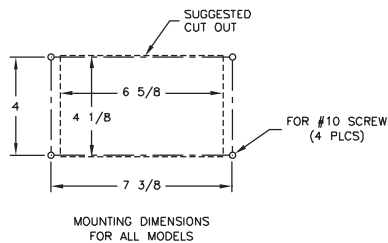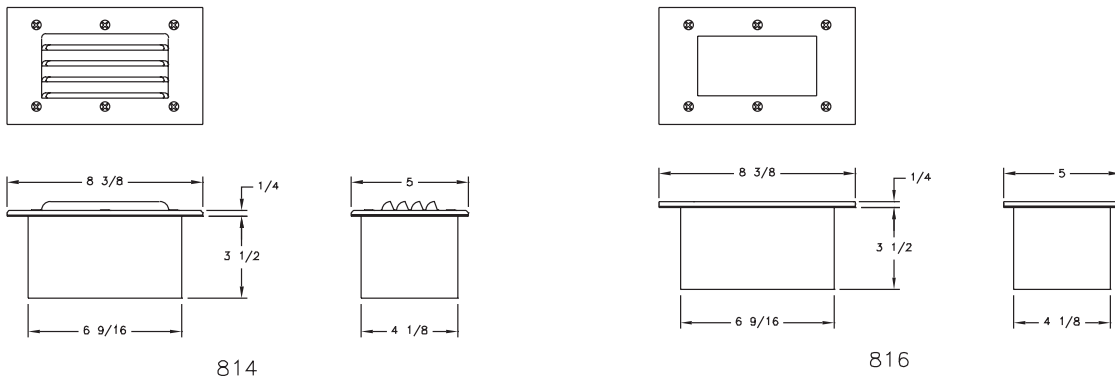

Dimensions in inches